



ABSIDE 6-8-10-12-15-20-25-30

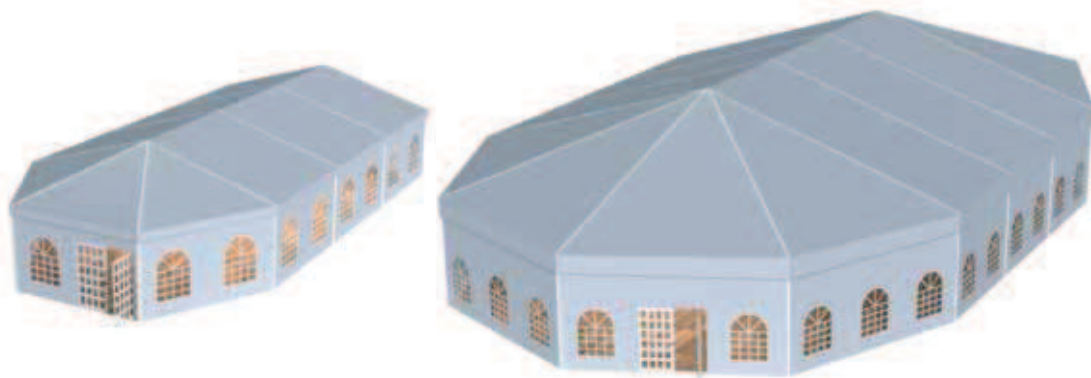

L'immagine è solo a scopo illustrativo

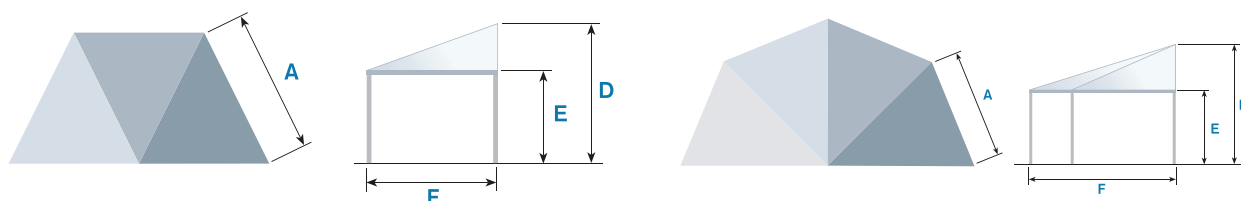

ABSIDE OPEN

MISURE STRUTTURA

	O6	O8	O10
A mt.	2,96	3,96	4,96
E mt.	2,42	2,42	2,42
D mt.	3,34	3,65	3,96
F mt.	2,56	3,43	4,30
inclinazione	18°	18°	18°
trave mt.	2,96	4,01	5,07
lati n.	3	3	3
area coperta mq.	11,69	20,78	32,50
profilo trave/colonna mm.	81,5x47	81,5x47	81,5x47
max spinta vento (EN 13782)	30 daN/mq.	30 daN/mq.	30 daN/mq.

teli di copertura e laterali

tessuto spalmato PVC ignifugo cl. 2 / cristal



ABSIDE MEETING

MISURE STRUTTURA

	M6	M8	M10	M12
A mt.	3,03	4,03	5,03	4,62
E mt.	3,00	3,00	3,00	3,00
D mt.	4,00	4,30	4,64	4,98
F mt.	2,70	3,56	4,43	6,20
inclinazione	18°	18°	18°	18°
trave mt.	3,04	4,10	5,14	6,20
lati n.	3	3	3	4
area coperta mq.	12,60	22,00	34,00	51,50
profilo trave/colonna mm.	130x70	130x70	130x70	130x70
max spinta vento (EN 13782)	30 daN/mq.	30 daN/mq.	30 daN/mq.	50 daN/mq.

teli di copertura e laterali




tessuto spalmato PVC ignifugo cl. 2 / cristal

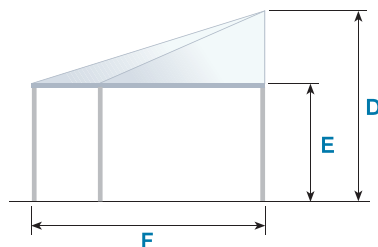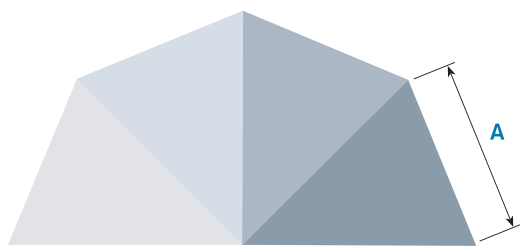

ABSIDE PROFESSIONAL PROF. 200x120

MISURE STRUTTURA

	P10	P12	P15	P20
A mt.	3,85	4,62	5,78	7,68
E mt.	3,10/4,00	3,10/4,00	3,10/4,00	3,10/4,00
D mt.	4,75/5,65	5,07/5,97	5,55/6,45	6,37/7,27
F mt.	5,20	6,20	7,70	10,20
inclinazione	18°	18°	18°	18°
trave mt.	5,17	6,22	7,80	10,43
lati n.	4	4	4	4
area coperta mq.	38,70	55,00	84,00	147,40
profilo trave/colonna mm.	200x120	200x120	200x120	200x120
max spinta vento (EN 13782)	50 daN/mq.	50 daN/mq.	60 daN/mq.	60 daN/mq.
teli di copertura e laterali	tessuto spalmato PVC ignifugo cl. 2 / cristal			

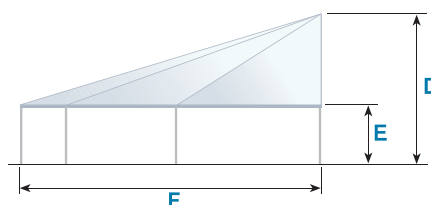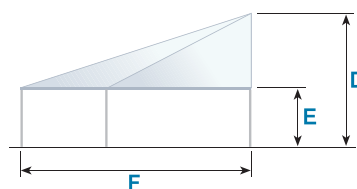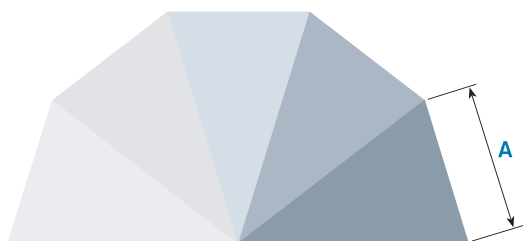

ABSIDE PROFESSIONAL PROF. 200/300x120

MISURE STRUTTURA

	P25	P30
A mt.	7,75	7,77
E mt.	3,00/4,00	4,00
D mt.	7,18/8,08	8,92
F mt.	12,22	15,25
inclinazione	18°	18°
trave mt.	13,10	15,73
lati n.	5	6
area coperta mq.	240,00	350,00
profilo trave/colonna mm.	200x120	300x120
max spinta vento (EN 13782)	60 daN/mq.	60 daN/mq.
teli di copertura e laterali	tessuto spalmato PVC ignifugo cl. 2 / cristal	